


T-Bolt Clamp with Fixed Bridge



Ref. standard: SAE J1508 Type "TB"

- Broad bandwidth provides uniform clamping force.
- Nyloc nut prevents loosening due to any heavy vibrations.
- Adaptable to different hose diameters.

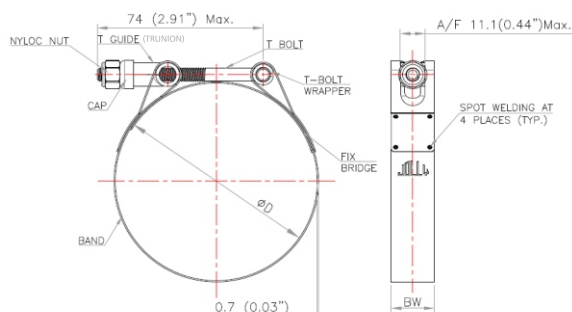

Example for Ordering Code

TX M01 B06 44

Design Type

Jolly Size

Material Grade

Band width (BW)

Design Type Ordering Code : TX

Ordering Code	Material Grade Option
M01	Band : SS 301 / 304 Trunion, T-Bolt & Nut : SS 301 / 304
M02	Band & Trunion : SS 301 / 304 T-Bolt & Nut : Plated Carbon Steel
M05	Band : SS 201 / 202 Trunion, T-Bolt & Nut : Plated Carbon Steel
M06	Band : SS 316 Trunion, T-Bolt & Nut : SS 316
M07	Band & Trunion : SS 201 / 202 T-Bolt & Nut : Plated Carbon Steel
M10	Band, T-Bolt, Trunion : SS 201 / 202 Nut : Plated Carbon Steel
M15	Band, T-Bolt, Trunion : SS 301 / 304 Nut : Plated Carbon Steel
M17	Band : SS 301 / 304 Trunion, T-Bolt, Nut : Plated Carbon Steel

Ordering Code	Band Width (BW) & Bridge Width (BW) Options
B05	Band & Fix Bridge : 14 mm (0.55")
B06	Band & Fix Bridge : 19 mm (0.75")
B10	Band & Fix Bridge : 22.2 mm (0.87")

We reserve the right to make technical modifications.
UPC code can be made available on request.
Additional sizes made available on request.
Packing Specification will be provided as per request.

Jolly sizes as per SAE Standard

Jolly Size Ordering Code	SAE Sizes	Min Dia (in)	Max Dia (in)	Min Dia (mm)	Max Dia (mm)
16	-	1 3/8	1 9/16	35.1	38.6
20	-	1 1/2	1 5/8	38.1	41.7
24	-	1 5/8	1 7/8	41.4	46
26	-	1 2/3	1 4/5	42.5	45.5
28	28	1 3/4	2	44.5	50.8
32	32	1 7/8	2 3/16	47.8	55.6
34	34	1 15/16	2 1/4	49.2	57.2
36	36	2	2 5/16	50.8	58.7
38	38	2 1/16	2 3/8	52.4	60.3
40	40	2 1/8	2 7/16	54.1	62
42	42	2 3/16	2 1/2	55.6	63.5
44	44	2 1/4	2 9/16	57.2	65
48	48	2 3/8	2 11/16	60.5	68.3
52	52	2 1/2	2 13/16	63.5	71.4
54	54	2 9/16	2 7/8	65.1	73.0
56	56	2 5/8	2 15/16	66.8	74.7
60	60	2 3/4	3 1/16	69.9	77.7
64	64	2 7/8	3 3/16	73.2	81
68	68	3	3 5/16	76.2	84.1
72	72	3 1/8	3 7/16	79.5	87.4
74	72	3 1/8	3 7/16	79.5	87.4
76	76	3 1/4	3 9/16	82.6	90.4
78	78	3 5/16	3 5/8	84.1	92.1
80	80	3 3/8	3 11/16	85.9	93.7
84	84	3 1/2	3 13/16	88.9	96.8
88	88	3 5/8	3 15/16	92.2	100.1
92	92	3 3/4	4 1/16	95.3	103.1
96	96	3 7/8	4 3/16	98.4	106.4
100	100	4	4 5/16	101.6	109.5
104	104	4 1/8	4 7/16	104.8	112.7
108	108	4 1/4	4 9/16	108	115.8
110	110	4 5/16	4 5/8	109.5	117.5
112	112	4 3/8	4 11/16	111.1	119.1
116	116	4 1/2	4 13/16	114.3	122.2
124	124	4 3/4	5 1/16	120.7	128.5
132	132	5	5 5/16	127	134.9
134	134	5 1/16	5 3/8	128.6	136.5
140	140	5 1/4	5 9/16	133.4	141.2
142	142	5 5/16	5 5/8	134.9	142.9
144	144	5 3/8	5 11/16	136.5	144.5
146	146	5 7/16	5 3/4	138.1	146.1
148	148	5 1/2	5 13/16	139.7	147.6
156	156	5 3/4	6 1/16	146.1	153.9
164	164	6	6 5/16	152.4	160.3
168	168	6 1/8	6 7/16	155.6	163.5
172	172	6 1/4	6 9/16	158.8	166.6
174	174	6 5/16	6 5/8	160.3	168.3
180	180	6 1/2	6 13/16	165.1	173
188	188	6 3/4	7 1/16	171.5	179.3
196	196	7	7 5/16	177.8	185.7
204	204	7 1/4	7 9/16	184.2	192
212	212	7 1/2	7 13/16	190.5	198.4
220	220	7 3/4	8 1/16	196.9	204.7
228	228	8	8 5/16	203.2	211.1
236	236	8 1/4	8 9/16	209.6	217.4
244	244	8 1/2	8 13/16	215.9	223.8

Additional sizes are available as per enquiry.

T-Bolt Specification		
Band		T-Bolt Size
Width	Thickness	
14 mm	0.65 mm	M5
19 mm	0.65 mm	1.4"
22.2 mm	0.65 mm	5/16"
22.2 mm	1.2 mm	M8

T-Bolt in material SS 304, SS 410, AISI 15B25/AISI 1541